



Double-Hook ATV Gun & Utility Holder

Mounting Instructions




Made in U.S.A.

Read and follow all instructions before installation and using your Rugged Gear ATV Holder.

**Follow all Federal, State and Local Laws and Regulations.
Never put a loaded gun in a
Rugged Gear Gun & Utility Holder!**

The Rugged Gear Double-Hook ATV Holder is designed to be mounted on ATVs, motorcycles, mountain bikes, etc. The flexibility of the swivel design allows this Holder to be mounted in non-parallel positions, while hooks can be swiveled and locked to be parallel. Carry 2 firearms, tools, or equipment forward, sideways, up and down, on the front or on the back of your ATV.

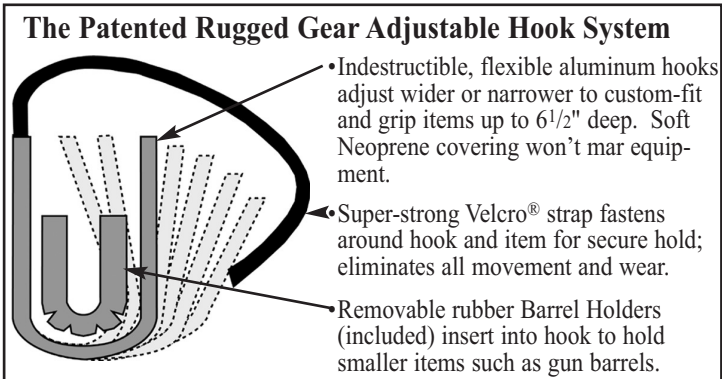



This is the absolute best gun holder you can buy to prevent movement and protect your firearms and equipment from stock & bluing wear!

ASSEMBLY AND INSTALLATION

• **Remove all parts from the package.**

- | | | |
|--------------------------|---------------------------|----------------------|
| • Hook Brackets (2) | • Main Base (2) | • Clamp (2) |
| • Long Bolts (2) | • Short Bolts (4) | • Barrel Holders (2) |
| • Allen Wrench, 1/8" (1) | • Allen Wrench, 3/16" (1) | |

- **Determine mounting location**— the Rugged Gear ATV Gun & Utility Holder will mount to nearly any round or square bar, at any desired position or angle.
- **Measure length of shortest item.** Position mounts to allow for holding the shortest item as near its ends as possible, and outside of any scope, action or bow frame.
- **Position Main Base & Clamp around bar.**
- **Insert short bolts through Main Base into Clamp.** Tighten loosely with $\frac{3}{16}$ " allen wrench.
- A Set Screw is pre-installed in the Main Base. (See Fig. 1) If the Holder slips on the bar after the Clamp has been tightened, tighten the Set Screw from the top of the Main Base with $\frac{1}{8}$ " allen wrench until it holds tightly.
- If the Holder continues to slip, remove it and drill a $\frac{7}{32}$ " hole into the bar on your ATV's rack at the point marked by the Set Screw on the bar. Re-install Main Base and Clamp on bar, and tighten the Set Screw into drilled hole.
- **Position Hook Bracket in the Ribbed Swivel Mechanism.** (Fig. 2)
- **Insert long bolt into top of Hook Bracket through Ribbed Swivel into the Main Base.**
- **Tighten loosely with $\frac{3}{16}$ " allen wrench.**

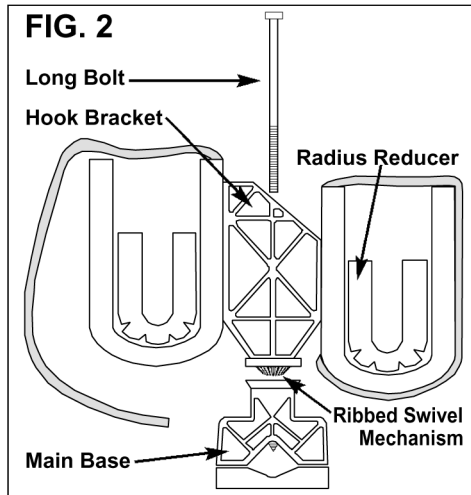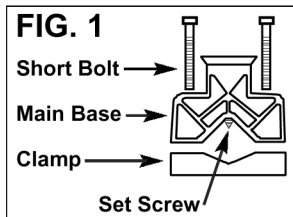

(Continued)

- **Repeat process with second Hook Bracket**, positioning it parallel to first hooks.
- **Place item to be held in Holder.**
- **Adjust angle and position of brackets; tighten all bolts securely.**

NORMAL OPERATION

- Pull back the Velcro® strap of each hook.
- If needed, insert Barrel Holder for securing the smaller parts of your guns, bows, fishing poles or tools.
- The hooks can be bent and shaped to tightly fit whatever item is being put into them. For maximum holding protection, “over-bend” each hook so that it is smaller than the item to be held and then force the item into the hook.
- Squeeze hooks tightly against object and secure Velcro® straps.
- Verify that items are held tightly and re-tighten if necessary.

GUARANTEE

Rugged Gear Gun Holders have a 60-day money-back guarantee. If you are not completely satisfied, return them for a full refund.

Additional Barrel Holders can be purchased by contacting us:

Rugged Gear
32588-477th Avenue
Elk Point, SD 57025-9702
U. S. A.

(800) RUGGED 1
(800) 784-4331
(605) 356-2491
Fax (800) 784-3268

www.ruggedgear.com

Ask for a free catalog of hunting & shooting accessories!